



Zug Corp Catalog

About Us

10 years' OEM/ODM experience

One of the Leading Manufacturers of Security Products

Zug Corp Limited has been one of the leading manufacturers and distributors of security products for more than 10 years in China. With headquarters in Dongguan, our expanding network of sales and support centers across all over the world provides premium brands you can trust, and service standards you can rely on. Our professional marketing team provides customers both overseas

and domestic with quality products and services. and domestic with quality products and services.

Backed by Professional R&D Team

Zug Corp Limited has excellent manufacturing facilities in China and strong backup of R&D team. We are with senior experience of product design for ODM and OEM projects. We are a customer-focused organization to offer you superior quality in speedy and flexible service.

Work with Us Today

Our vision:

- Brand: to become one of the leaders in outstanding innovation and pioneering technologies in security solutions worldwide.
- Partners: cultivate a winning network of partners, maximize profit margins for our partners, provide richer solutions and create mutual benefit.
- Social responsibility: we will take our responsibility to create justice, good working environment for our staff, and environment-friendly building a peaceful, sustainable planet.
- Responsibility: based on the needs of our customers and partners, offering quality products, best service and professional support.



ZUG CORP's solutions

* ZUG CORP offers a wide range of excellent gate automation from tri-pod turnstiles, flap barrier gate, swing barrier gate, full-height turnstile, bollards, road blocker, all kinds of auto gates, parking system, electronic security solutions...

* Our turnstiles and gates are designed to enhance and optimize manpower at your entrance points. These systems will provide you with efficient and elegant control of individual access to your premises. They are straightforward to install, easy to understand and simple to maintain.

* Zug Corp products find a wide application in industrial enterprises, living garden, building offices, shops, museums, security installations, prisons, nuclear power plants airports, railways, seaports, exhibition centers, ski resorts, fitness, and other fields.



TRI-POD TURNSTILE

Description

- ▶ Compatible with different identification systems cards, such as IC, ID card, fingerprint, QR Code etc(Optional)
- ▶ Equipped with international standard interface, enable to integrate with other devices ,and remote controlled by supervision computer
- ▶ The arm will drop automatically when power-off , turn to horizontal when power-on, Pushing force is 0.3kg
- ▶ LED indicators, green arrows for entry free, Red Cross for passage locked.
- ▶ Reversed passing alarm function, it will alarm if pedestrian pass from opposite direction, or break-in
- ▶ Self-inspection and alarm function if break-down, Normal-Open / Normal-Close mode can be set up in control board.
- ▶ Automatically reset function. It will be locked if the pedestrian didn't pass through within preset time, The passing time is adjustable.

Application

Subway Station, hover-port, Tourism Sports, Exhibition, Swimming Hall, Residence Area,

Enterprise's Entrance and Exit, Gateway Guard, Charge Management



ExtensionFunction

- + Voice prompt system can be added, for guiding pedestrian pass correctly (Optional)
 - + Automatic identification, counting function, Pedestrian flow control, attendance check or fare collection. (Optional)
 - + Arm length / Pass width extendable
 - + Logic judgment by photocells
- Counting function of the controller, + LED figure display function (optional)




Model No: Z-TT42

▶ Size:	1400x280x980mm
▶ Unlock time:	0.2 sec
▶ Pass rate:	35 person/min
▶ Pass width:	<550mm
▶ Input:	100V~240V
▶ Motor voltage:	24v
▶ Environment:	-25~+70
▶ Power consumption:	30w



Model No: Z-TT25

Size: 480x280x980mm

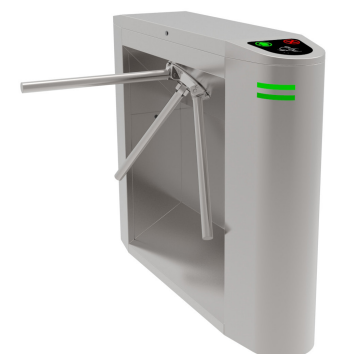

Model No: Z-TT33

Size: 1200x300x980mm

SWING BARRIER GATE

Description

- ▶ Compatible with variety of cards, such as IC, ID card. (Optional)
- ▶ Equipped with international standard interface, enable to integrate with other devices, and remote controlled by supervision computer
- ▶ With anti-strike function to protect pedestrian
- ▶ The flaps will open automatically when power-off and recover N/C mode after power on, conform to Fire protection standard
- ▶ Self-inspection and alarm function if break-down, Normal-Open / Normal-Close mode can be set up in control board.
- ▶ Reversed passing alarm function, it will alarm if pedestrian pass from opposite direction, or break-in
- ▶ with memory function, availability of continuous passing by pedestrians
- ▶ Automatically reset function. It will be locked if the pedestrian didn't pass through within preset time, the passing time is adjustable

Extension Function

- ▶ Voice prompt system can be added , for guiding pedestrian pass correctly (Optional)
- ▶ Automatic identification, counting function, Pedestrian flow control, attendance check or fare collection. (Optional)
- ▶ Control panel has memory function (Optional)
- ▶ Arm length / Pass width extendable
- ▶ Logic judgment by photocells (8 pairs or 10 pairs)
- ▶ Counting function of the controller, LED figures display function (optional)

Application

Subway Station, Hoverport, Tourism Sports, Exhibition, Swimming Hall, Residence Area,

Enterprise's Entrance and Exit, Gateway Guard, Charge Management


Model No: Z- SW53

- | | |
|----------------------|----------------|
| ▶ Size: | 1400x250x980mm |
| ▶ Unlock time: | 0.2 sec |
| ▶ Pass rate: | 35 person/min |
| ▶ Pass width: | <900mm |
| ▶ Input: | 100V~240V |
| ▶ Motor voltage: | 24v |
| ▶ Environment: | -25~+70 |
| ▶ Power consumption: | 35w |



Model No: Z- SW27

Size: 1400x185x1020mm

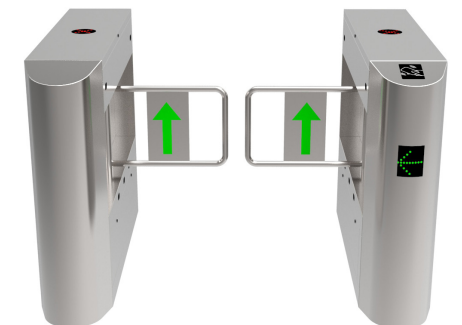

Model No: Z- SW14

Size: 1400x280x980mm

SPEED GATE

Description

- ▶ compatible with different identification systems cards, such as IC, ID card, fingerprint, QR Code, etc.
- ▶ Equipped with international standard interface, enable to integrate with other devices ,and remote controlled by supervision computer
- ▶ With infrared detectors to run anti-strike function to protect pedestrian
- ▶ The flaps will open automatically when power-off and recover N/C mode after power on, conform to Fire protection standard
- ▶ LED indicators, green arrows for entry free, Red Cross for passage locked.
- ▶ Reversed passing alarm function,it will alarm if pedestrian pass from opposite direction, or break-in, tailing, overpass
- ▶ Self-inspection and alarm function if break-down, Normal-Open / Normal-Close mode can be set up in control board.
- ▶ With memory function, availability of continuous passing by pedestrians
- ▶ Automatically reset function. It will be locked if the pedestrian didn't pass through within preset time, The passing time is adjustable

Extension Function

- ▶ Voice prompt system can be added , for guiding pedestrian pass correctly (Optional)
- ▶ Automatic identification, pedestrian flow control, attendance check or fare collection. (Optional)
- ▶ Control panel has memory function (Optional)
- ▶ Logic judgment by photocells
- ▶ Counting function of the controller, LED figures display function (optional)



Application

Subway Station, Hoverport, Tourism Sports,Exhibition, Swimming Hall,Residence Area,

Enterprise's Entrance and Exit,Gateway Guard,Charge Management


Model No: Z-CR68

- | | |
|----------------------|----------------|
| ▶ Size: | 1210x185x960mm |
| ▶ Unlock time: | 0.2 sec |
| ▶ Pass rate: | 35 person/min |
| ▶ Pass width: | <600mm |
| ▶ Input: | 100V~240V |
| ▶ Motor voltage: | 24v |
| ▶ Environment: | -25~+70 |
| ▶ Power consumption: | 35w |

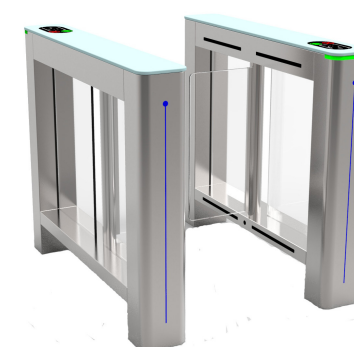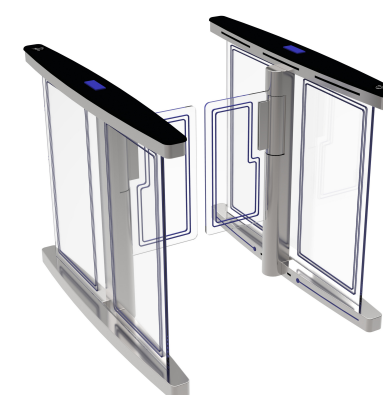

Model No: Z-CR73

Size: 1210x195x980mm

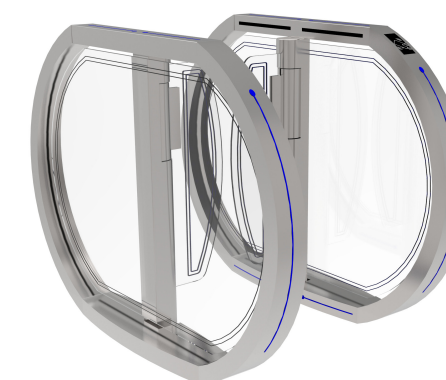

Model No: Z-CR54

Size: 1400x160x960mm

FLAP BARRIER GATE

Description


- ▶ compatible with different identification systems cards, such as IC, ID card, fingerprint, QR Code etc (Optional)
- ▶ Equipped with international standard interface, enable to intergrate with other devices ,and remote controlled by suspervsion computer
- ▶ The arm will drop automatically when power-off , turn to horizontal when power-on, Pushing force is 0.3kg
- ▶ LED indicators, green arrow for entry free, Red Cross for passage locked.
- ▶ Reversed passing alarm function,it will alarm if pedestrian pass from opposite direction, or break-in
- ▶ Self-inspection and alarm function if break-down, Normal-Open / Normal-Close mode can be set up in control board.
- ▶ Automatically reset function. It will be locked if the pedestrian didn't pass through within preset time, The passing time is adjustable

Application

Subway Station, Hoverport, Tourism Sports,Exhibition, Swimming Hall,Residence Area,
Enterprise's Entrance and Exit,GatewayGuard,Charge Management

Extension Function

- ▶ Voice prompt system can be added , for guiding pedestrian pass correctly (Optional)
- ▶ Automatic identification, counting function,Pedestrian flow control, attendance check or fare collection. (Optional)
- ▶ Control panel has memory function (Optional)
- ▶ Swing length / Pass width extendable
- ▶ logic judgment by photocells (8 pairs or 10 pairs)
- ▶ Counting function of the controller, LED figure display function (optional)

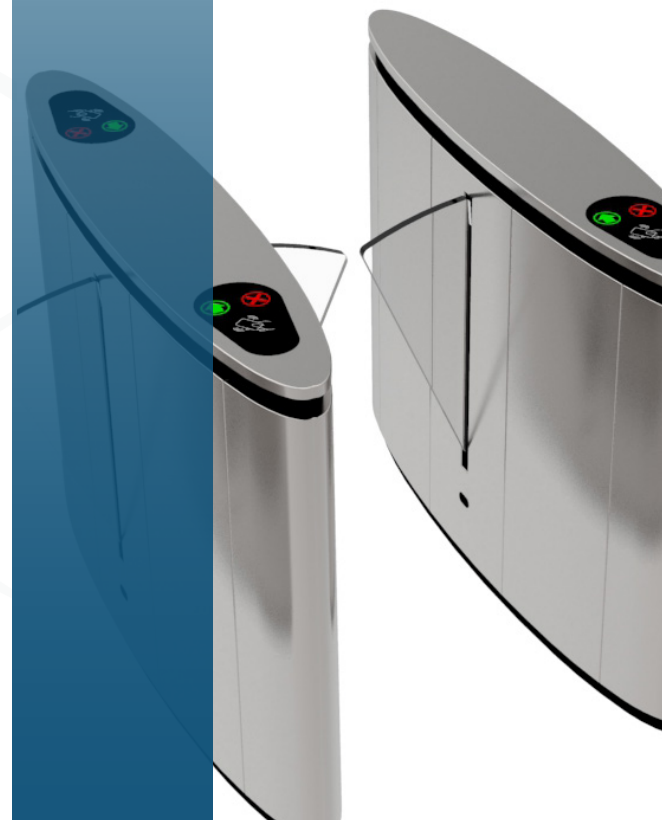


Model No: Z-FP49

Size: 1430x310x1005mm

Model No: Z-FP38

▶ Size:	1400x185x960mm
▶ Unlock time:	0.2 sec
▶ Pass rate:	35 person/min
▶ Pass width:	<550mm
▶ Input:	100V~240V
▶ Motor voltage:	24v
▶ Environment:	-25~+70
▶ Power consumption:	35w

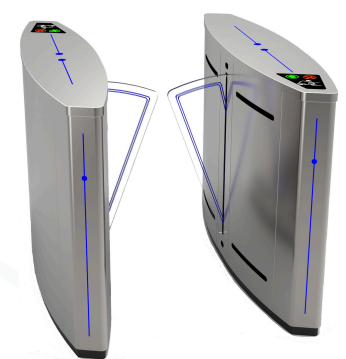

Model No: Z-FP40

Size: 1400x280x980mm

SLIDING GATE

Description

- ▶ Compatible with variety of cards, such as IC, ID card. (Optional)
- ▶ Equipped with international standard interface, enable to integrate with other devices, and remote controlled by supervision computer
- ▶ With anti-strike function to protect pedestrian
- ▶ The flaps will open automatically when power-off and recover N/C mode after power on, conform to Fire protection standard
- ▶ LED indicators, green arrows for entry free, Red Cross for passage locked.
- ▶ Self-inspection and alarm function if break-down, Normal-Open / Normal-Close mode can be set up in control board.
- ▶ Reversed passing alarm function, it will alarm if pedestrian pass from opposite direction, or break-in
- ▶ Reversed passing alarm function, it will alarm if pedestrian pass from opposite direction, or break-in
- ▶ With memory function, availability of continuous passing by pedestrians
- ▶ Automatically reset function. It will be locked if the pedestrian didn't pass through within preset time, The passing time is adjustable



Extension Function

- Voice prompt system can be added, for guiding pedestrian pass correctly (Optional)
- Access Automatic identification, counting function, Pedestrian flow control, attendance check or fare collection. (Optional)s control System
- Control panel has memory function (Optional)
- Arm length / Pass width extendable
- Logic judgment by photocells (8 pair or 10 pairs)
- Counting function of the controller, LED figure display function (optional)

Application

Subway Station, Hoverport, Tourism Sports,Exhibition, Swimming Hall,Residence Area, Enterprise's Entrance and Exit,GatewayGuard,Charge Management didn't pass through within preset time, The passing time is adjustable



Model No: Z-SLG01

▶ Size:	1400x350x980mm
▶ Unlock time:	0.2 sec
▶ Pass rate:	35 person/min
▶ Pass width:	<600mm
▶ Input:	100V~240V
▶ Motor voltage:	24v
▶ Environment:	-25~+70
▶ Power consumption:	35w



Model No: Z-SLG02

Size: 1410x340x1005mm



Model No: Z-SLG46

size: 1500x435x10800mm


FULL HEIGHT TURNSTILE

Description

- ▶ Compatible with different identification systems cards, such as IC, ID card, fingerprint, QR Code etc (Optional)
- ▶ Equipped with international standard interface, enable to integrate with other devices, and remote controlled by supervision computer
- ▶ The mechanism is equipped with an automatic regulated hydraulic buffer device. No noise and impact when running.
- ▶ The center rotor will be set free (default) or locked (optional) automatically when power-off.
- ▶ Push button switch override controls for emergency situations, conform to safety standard
- ▶ LED indicators, green arrows for entry free, Red Cross for passage locked. Anti-reverse rotation function: when turnstile rotates for 60° in reverse direction, make sure each authentication only allow one person to pass
- ▶ Self-inspection and alarm function if break-down,
- ▶ Automatically reset function. It will be locked if the pedestrian didn't pass through within preset time, the passing time is adjustable

Extension Function

- Voice prompt system can be added, for guiding pedestrian pass correctly (Optional)
- Automatic identification, counting function, Pedestrian flow control, attendance check or fare collection. (Optional)
- Control panel has memory function (Optional)
- Swing length / Pass width extendable
- Counting function of the controller, LED figure display function (optional)

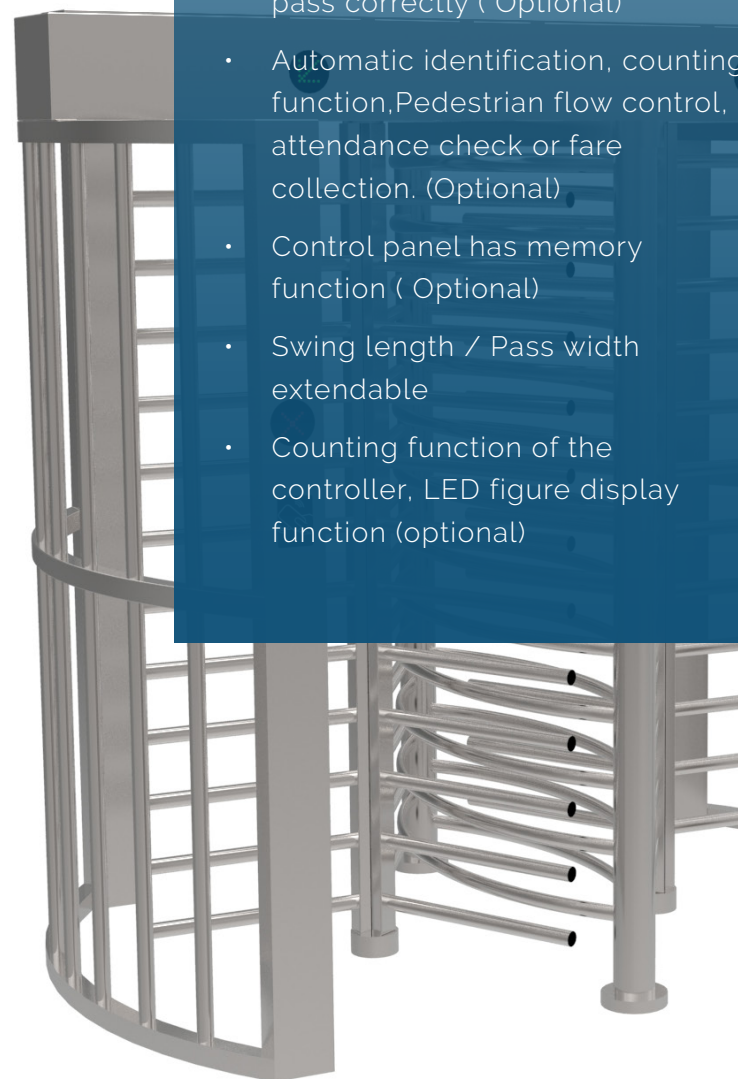


Application

Subway Station, Hoverport, Tourism Sports, Exhibition, Swimming Hall, Residence Area, Enterprise's Entrance and Exit, Gateway Guard, Charge Management




Model No: Z-FHT01

- | | |
|----------------------|------------------|
| ▶ Size: | 1400x1200x2310mm |
| ▶ Unlock time: | 0.2 sec |
| ▶ Pass rate: | 30 person/min |
| ▶ Pass width: | <650mm |
| ▶ Input: | 100V~240V |
| ▶ Motor voltage: | 24v |
| ▶ Environment: | -25~+70 |
| ▶ Power consumption: | 30w |

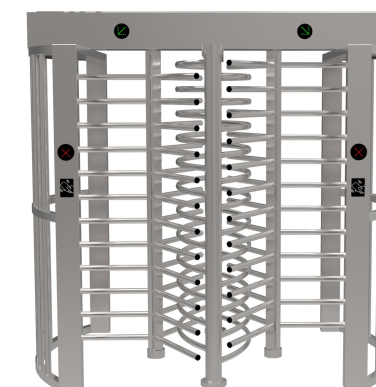

Model No: Z-FHT01-2

Size: 2400x1500x2310mm

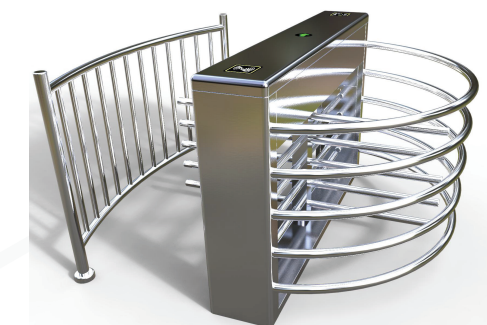

Model No: Z-FHT59

Size: 1500x280x980mm




Hydraulic Road Blockers & Rising Bollards

Road Blockers and Rising Bollards are designed to offer an impact-resistant barrier to vehicle access and are well suited to 'High Security' sites. Such installations may range from car parks through to anti-terrorist protection of defense sites. Whether the requirement is for simple, low costs rising Bollards for relatively low volume usage or a heavy-duty, anti-terrorist road blocker for frequent operations.

1 NEW Integrated Hydraulic Rising Bollard

ZUG CORP hydraulic rising bollards design intentions were controlling road traffic equipment, we have a new integrated hydraulic rising bollards, the hydraulic device is inside the bollard. When installing, you just need to lead the power cable out to the controller. It is very easy to install and operate application.

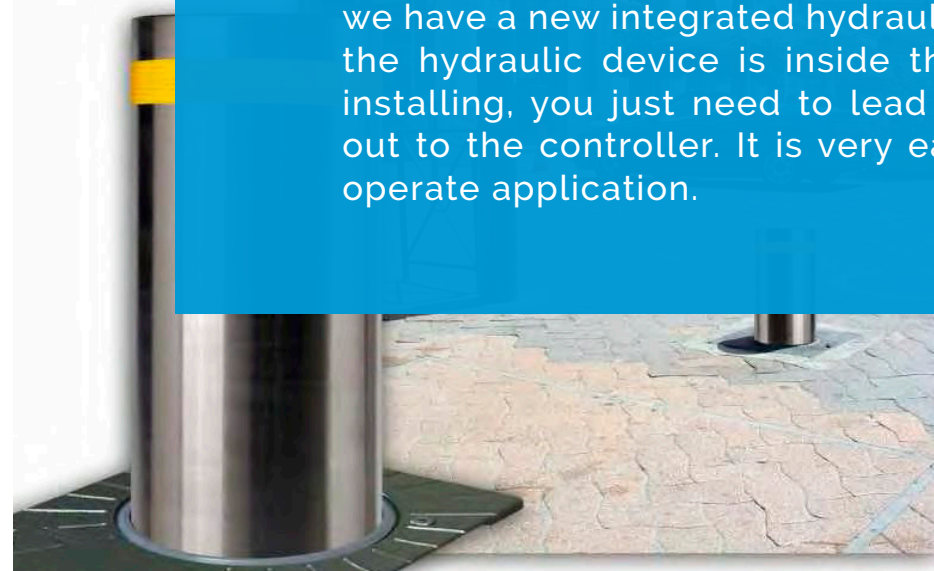

Specification

- ▶ Control system: Electrical Hydraulic system
- ▶ Min passing pressure: 80 ton truck
- ▶ Motor Voltage: 220V
- ▶ Control voltage: 24V
- ▶ PLC: Americal Original Chip
- ▶ Rising speed: 3-5S adjustable
- ▶ Dropping speed: ≤3S adjustable
- ▶ Working temperature: -25~75
- ▶ Storage temperature: -10~65, water-proof, damp-proof and dust-proof
- ▶ Material: Stainless steel Tube and A3 steel
- ▶ Hydraulic cylinder: HOB63-600CA+I (industrial grade)
- ▶ Pump Type: Vane Pump
- ▶ Oil Container: 6 liters

Parameters

- ▶ Diameter : 168mm,219mm,273mm
- ▶ Standard Rising height : 600mm (can be customized)
- ▶ Thickness : 6mm to 10mm



Product Show



2 ROAD BLOCKERS

ZUG CORP road blocker is a high security electromechanical retractable obstacle. Its structure and its dimensions enable it to resist violent impacts, secures the entrances to sites with a very high degree of control, with a risk of intrusion.

Applications this product will protect: sites requiring a high level of perimeter protection, access points needing a solid barrier to control vehicle access and to restrict pedestrian flow.



Technical specifications

- ▶ Control system : Hydraulic system
- ▶ Min passing pressure: 80ton
- ▶ Supply Voltage : 380VControl voltage 24V
- ▶ System dynamic power (w): 3.7KW..
- ▶ Rising speed : ≤3 (adjustable)
- ▶ Length: 3000mm
- ▶ Material : A3 steel,anti-rust paint,blade
- ▶ material : Stainless steel
- ▶ Blade thickness: 22mm
- ▶ blocker thickness: 16mm
- ▶ Dimension: L3000*W1000*H760
- ▶ Interception length: 2600
- ▶ Weight: about 1.2 ton



Z-RB01

Technical specifications

- ▶ System control mode: hydraulic oil control;
- ▶ Max. Pressure: 80 tons container truck;
- ▶ System power: 3.7KW / 380 v;
- ▶ Hydraulic tank capacity: 60 liter/ 80liter/120liter(can customized)
- ▶ Length: 3meters (can be customized);
- ▶ Size: 3000*1000*760mm(customized available);
- ▶ Interception length: 2600
- ▶ Control Mode: key /remote control (optional);
- ▶ Weight : ± 1.2Tons;
- ▶ Lifting height: 500mm;
- ▶ Material thickness: 16mm
- ▶ with remote controller, hydraulic station, manual pump,control box



Z-RB04

Product Show




3 TIRE KILLER

The tire-killer is made of A3 steel and steel blade(Shape looks like speed bump). It adopts the mechanical and electrical integration remote control device,easily operated,safe and reliable.It is advanced equipment to intercept forbidden vehicles and terrorist vehicles.

When the interception is needed, press the Up button on the remote control,then steel blade will rise up immediately. If the vehicle force through, the tires will be punctured and deflated. When steel blades can effectively prevent the wheel passing and forced to stop.

When the interception task is over,press the Down button, the blade will retract back to the casing and standby.

This product has punctured and cars stop function. The price is competitive.

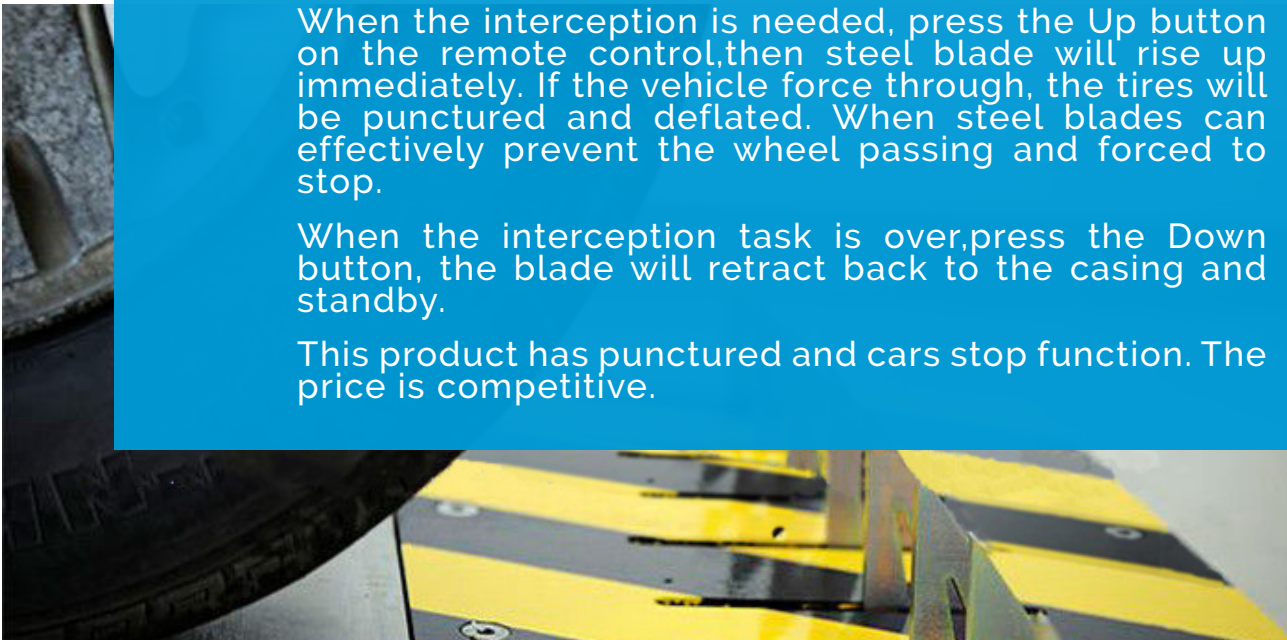



Technical specifications

- | | |
|---------------------------|--|
| ▶ Application range | Intersection safe protection in main area |
| ▶ Material | Q235 steel/A3 steel |
| ▶ Surface treatment | Paint with reflective stripe |
| ▶ IP | IP67 |
| ▶ Standard color | Black and yellow |
| ▶ Length | 3000mm |
| ▶ Width | 650mm |
| ▶ Height from ground | 70 -110mm |
| ▶ Min weight capacity | 80T |
| ▶ Blade height | 150mm |
| ▶ Blade thickness | 10mm |
| ▶ Operation mode | Electromechanical |
| ▶ Working environment | -40°C+70°C |
| ▶ Control mode | Short range wireless remote control/ drive-by-wire |
| ▶ Remote Control distance | ≤30M |
| ▶ Up/Down speed | 2s |
| ▶ Voltage | 220V |



Z-TK001

Cases

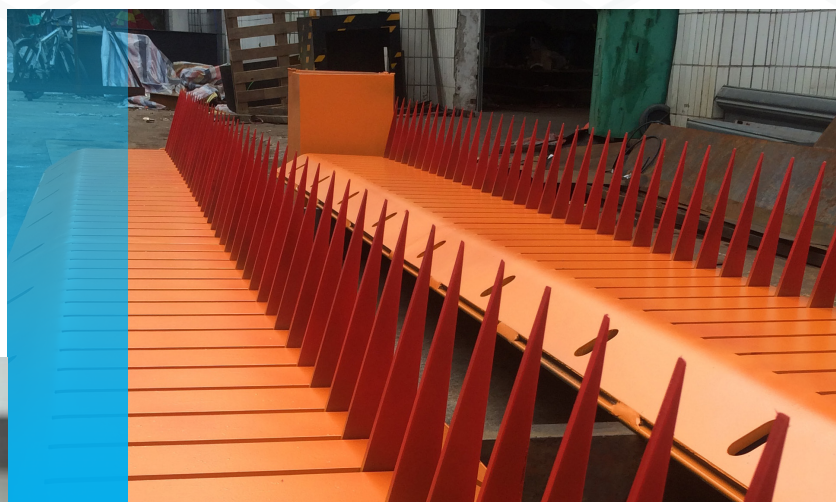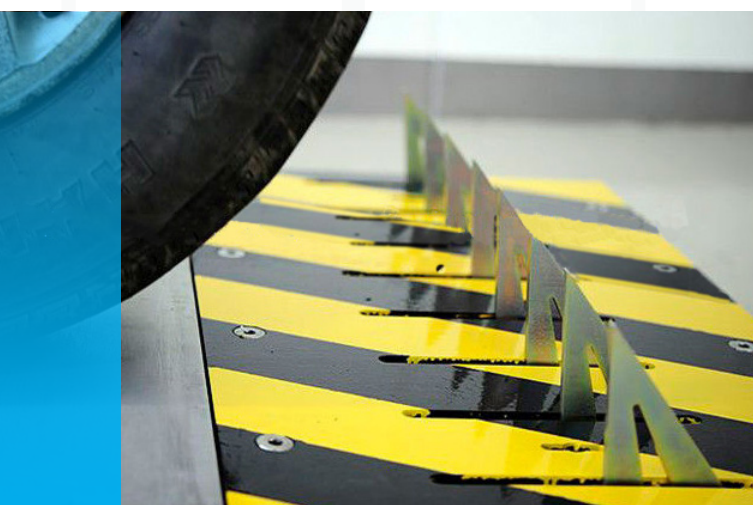

4 BARRIER GATES

A road barrier is the most functional and at the same time attractive solution for controlling public and private vehicle transit and access to rest areas, even with high traffic volumes.

Nice barriers are designed to professionally control every type of access: car parks, shopping centres, hotels, hospitals, exhibition centres, amusement parks, airports and railway stations, as well as all other types of small or large public facility.

Technical specifications

- ▶ Housing size: 340(L)*290(W)*1029(H)mm
- ▶ Housing material: 2.2mm cold-rolled steel plate
- ▶ Arm material: Aluminium alloy
- ▶ Arm type: Straight or Round
- ▶ Arm length: ≤6m
- ▶ Voltage: ±220V ± 10%, 110 ± 10%
- ▶ Motor voltage: 220V
- ▶ Protection grade: IP65
- ▶ Opening or closing time: 4 to 6 seconds
- ▶ Working temperature: -40°C to + 85°C
- ▶ Operating humidity: ≤90% non-condensing
- ▶ Operation lifespan: ≥5 million times
- ▶ Frequency: 50 to 60Hz
- ▶ Housing color keeping: 3-5 years
- ▶ Housing color: orange, yellow, blue, red, silver and etc





SMART CAR PARKING SYSTEM

Reduce illegal or unauthorized parking meaning more available spaces for permit holders

Make more efficient use of available spaces by controlling vehicle access at key entrances

Enforce parking policy by issuing warning notices and fines to people parking without permits or illegally

Key Feature

- ▶ Communication: RS485 TCP/IP
- ▶ Multi choices for card, IC card, ID card, barcode ticket
- ▶ Easy management software
- ▶ Heavy duty cabinet, galvanized steel and tempered glass
- ▶ User friendly voice prompt and display screen reminder
- ▶ Multi management report, like operation log, charge report, entry/exit report
- ▶ Waterproof, dustproof

System Introduction

- 1. Automatic Entry Terminal**
 - Automatic Card Dispenser
 - Automatic Ticket Dispenser
 - Monthly Proximity Card Reader
 - RFID Card Reader
 - Automatic Plate Number Recognition System
- 2. Automatic Exit Terminal**
 - Card Collector
 - Barcode Scanner
 - Monthly Proximity Card Reader
 - RFID Card Reader
 - Barrier open by Software
 - Automatic Plate Number Recognition System

Parking System Data Sheet

Model No: Z-PMS18



- | | |
|---------------------------------------|-------------------------------------|
| ▶ Parking system housing material | galvanized steel and tempered glass |
| ▶ Parking system card type | IC,EM,CPU,barcode ticket optional |
| ▶ Parking system dispenser/collector | TCP/IP, RS485 |
| ▶ Parking system communication | 50000 pcs |
| ▶ Parking system card no. capacity | 30000 pcs |
| ▶ Parking system read capacity | SQL server 2000 |
| ▶ Parking system database | windows 2000,2007,windows XP |
| ▶ Parking system operating system | indoor,outdoor |
| ▶ Parking system working environments | |
| ▶ Parking system relative humidity | ≤95% coagulation free |

System functions

- ▶ Multiple network mode, can realize remote data and image transmission;
- ▶ 32-bit ARM dual-core processing technology;
- ▶ Easy to install, debug and maintain;
- ▶ Mitre, EM, bar code, RFID available in one control board
- ▶ Nesting function available;
- ▶ Long extendible distance read function;
- ▶ Off-line working available;
- ▶ Extendible plate-number identification and auto-printing;
- ▶ Multiple charging mode, charging standards can be defined by the user;
- ▶ Automatic card dispenser;
- ▶ voice prompts available
- ▶ Flexible system configuration, can be extended to multi-level parking lot management systems;
- ▶ waterproof, dustproof and rustproof case
- ▶ Modular structure, high integration
- ▶ Wide screen



Z-PMS33



Z-PMS5C

INTELLIGENT QUEUE MANAGEMENT SYSTEM

Queuing is the major source of customer dissatisfaction in shops, hospitals, banks, government institutions, and any structure in direct contact with the public.

Fast service is a top priority for the customer, since his first contact with your institution to reply to his request.

Country Tech offers the right solution that will allow you to:

Manage and reduce queues for more efficiency and better customer service

Manage customer traffic in an optimized way and ensure proper routing to your services

Improve customer satisfaction and the performance of your employees

Collect statistics that allow you to have more information about the progress rate of your business, and help you to improve the profitability of your organization



Main function and Advantages

- ▶ System can support more than 100 kinds of services.
 - ▶ System support more than 10 units online unity dispenser ticket.
 - ▶ System support multi waiting area prompt calling information, waiting area Voice and display can be independent.
 - ▶ Ticket dispenser interface pictures can be changed by customer personalized design.
 - ▶ Each service key customer can be changed by customer personalized design.
 - ▶ Each service queue customers can be increase or decrease as needed.
 - ▶ Each service number of waiting people can set display on the interface, and any layout.
 - ▶ Each service work time and blocking period can set and change.
- Operating staff increase or decrease and Log into account can change.
- ▶ Voice calling information can easily set and change.
 - ▶ LED Display content can easily set and change.



Model No: Z-QK701

▶ LCD Size	22 inch
▶ Touch Screen	Five wire resistive touch screen, single point touch life 50 million times;
▶ Resolution:	4096*4096
▶ cabinet	Steel cabinet,Car metal paint,Antimagnetic, antistatic, Full steel streamlined cabinet
▶ Color	Main body slivery ,Screen frame Dark Grey
▶ Power supply	110--240V 50Hz/60Hz
▶ Speaker	With double channel and stereo surround amplifier system; Power:2 x 2W;frequency response:20Hz-20KHz
▶ Fan	Industrial control is axial flow fan, no noise, circulation cooling
▶ Work environment	Temperature:+5~+35 Humidity: 40% ~ 80%
▶ Port	USB,RJ45 or RJ11
▶ Product Size	1450mm(H)*470mm(W)*250mm(D)
▶ Net weight	39KG
▶ Printer	EPSON T532 80mm thermal printer
▶ Wireless Frequency	433 channel, strong anti-jamming capability
▶ Packing size	1580mm*610mm*550mm

- ▶ Every service category can easily set and change.
- ▶ Queue service customers of each operating staff can set.
- ▶ About ticket text pattern & business name & time format & can change the font and size, paper length can customize according to customers such as personalized settings.
- ▶ The system supports background music, music tracks entirely is electable.
- ▶ The system supports the manager on duty at the creation of monitoring software; Handle a variety of special situations.
- ▶ System has powerful Statistics management functions, can remote monitoring.
- ▶ Support Large Size LCD/LED for Main Display

Wireless Queue Management System calling pad

- ▶ Appearance streamlined design, novel, stylish and compact.
- ▶ LCD 60 degree angle design, you can clearly see the contents by sitting on a chair.
- ▶ DC 5V power supply design, you can use the power adapter, can also be inserted directly into usb port to take power.
- ▶ Built-in antenna, using generic 433 MHz frequency, there are high-power version and regular edition two versions, and reliable use of the radius is 500 meters.
- ▶ Support setting wireless channels, maximum support 16 channels to meet the needs of multiple systems in the same place.
- ▶ Multiple functions: automatic call, call a special number, customer transfer to other counter.
- ▶ Support power-saving mode, when the server shuts down automatically enter sleep mode after 10 minutes.
- ▶ Provide comprehensive secondary development interface kits, sample programs, customers easily integrate.




Model No: Z-WP402

LED DISPLAY UNIT

- ▶ LED display support for a single red or two-color, words can be customized for all size screen support wireless data transfer mode.



LED DISPLAY 1 LINE: Z-WSL01

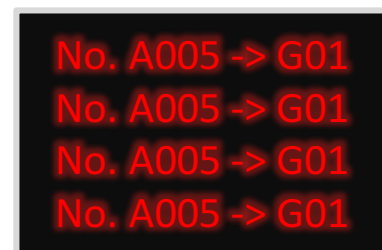

MAIN LED DISPLAY 4 LINE: Z-WBL01

Call-number software

- ▶ Call the next one: the call queue of the window act of people waiting for the next one. When you click on the button, then LED screen in the window display and hear the sound playing, "Please, No. xxx to xx the window handle" message.
- ▶ Call a specified number.
- ▶ Repeat the call: When the call the next one, repeat the call is active, this time by clicking the button in the LED display and audio playback hear, "Please, No. xxx to xx the window handle" message.
- ▶ Transfer customers to other counter.
- ▶ Suspended: when a staff member at rest or in a non-processing state, click closed, the corresponding integrated information screen, window screen show closed.

LCD-DISPLAY SOFTWARE

- ▶ LCD programs can set calling information displayed to the LCD or TV. Support for a host to connect multiple LCD or TVs, its use as a sub-display, LCD can also be installed on a remote PC.
- ▶ LCD program supports custom display information of the location, size, font, color, background, set the program to support the location and size of the screen, support for various formats of video display, audio, flash animation and so on.



Ticket Inspector

- ▶ Inspector program is usually installed in the offices of the hall's front desk or hospital triage units, for staff to manually assign ticket numbers to the specified work counter; you can easily number of tickets to human intervention.
- ▶ Inspector programs can be set waiting tickets manually assigned to a specified counter handle, and can set the priority of the ticket number, the priority from 0 to 255 of 256, the larger the number, the higher the priority.
- ▶ Inspector programs can view all currently waiting tickets number, service name, parameters such as time tickets; you can also open the ticket query and statistical interface.



Query & Statistics software

- ▶ Statistical programs can query the ticket number statistics can be respectively by counter, employees, time to classify statistics and output the appropriate report.
- ▶ Statistical procedures can also search query ticket number, status change, delete, you can view the results of employee satisfaction assessment. Query statistics to support network management that can manage in a single machine within the network all the queuing server, and view the statistics.
- ▶ All statistics and reports can be exported to Excel or Web file.

our success projects around the world




The bank in guangzhou



The residence community of
guangdong



The Iran office

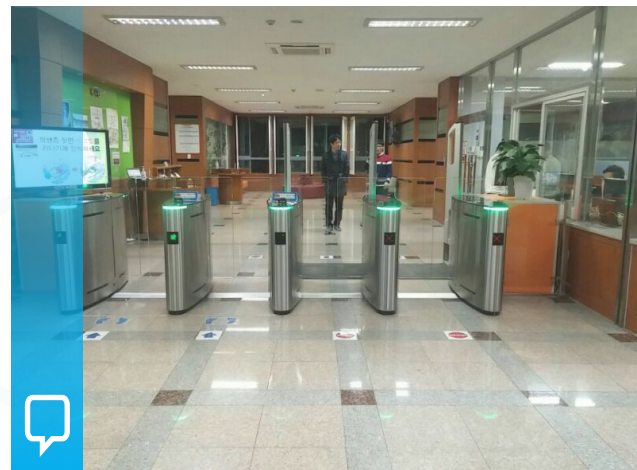

The library in korean


More
success



The reservoir in singapore



The animal park in Ghana

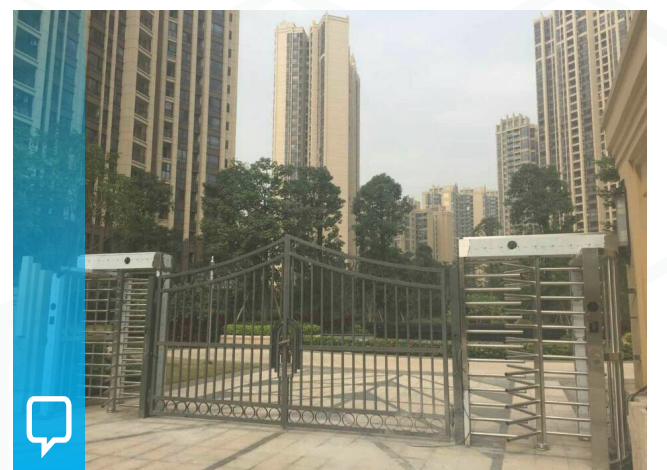

In guangzhou



ZUG CORP LIMITED

HK Adresse: 31/F, Tower One, Times Square, 1 Matheson Street, Causeway Bay, Hong Kong

Dongguan Adresse: RM1907, Sparkle Center, No.7, Liyuan Road, Zhangmutou Town, Dongguan City, China.

M: 0086 18682488218

T: 0086 769-86051068

E-Mail: overseas@zugcorp.com

www.zugcorp.com



www.zugcorp.com